



U.53KL2 | U.53KL - Non-tapped beams



Description:

- Non tapped beams allow to use clamps U.49P1 to U.49P9 to extract bearings by inside grip.
- U.53KL0: for clamps U.49P1 to U.49P4.
- U.53KL2: for clamps U.49P5 to U.49P9 with adaptor tip U.49BR1.

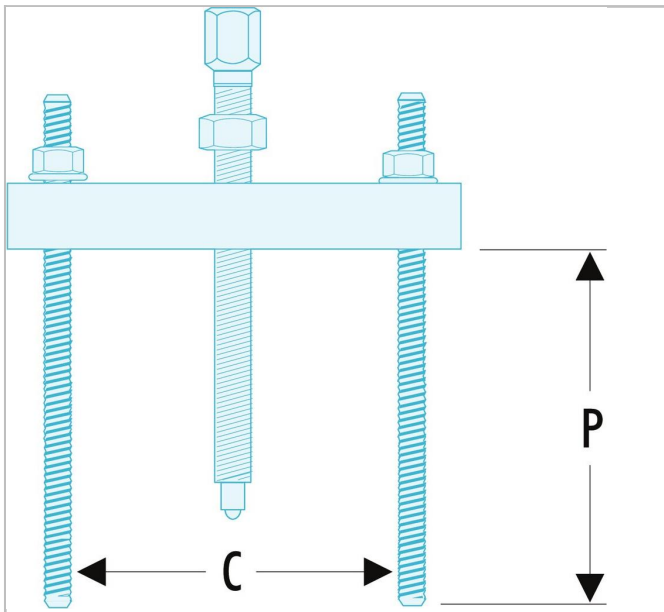

|  | U.53KL2 |
|--|-----------|
| Depth [mm] | 240.0 |
| Depth Maxi [mm] | 240.0 |
| Diameter [mm] | M16 |
| Diameter D1 [mm] | 11.0 |
| Length L [mm] | 220.0 |
| Length L1 [mm] | 280.0 |
| Length L2 [mm] | 30.0 |
| Length L3 [mm] | 30.0 |
| C Mini - Maxi [mm] | 70 - 200 |
| Hex Size [mm] | 11.0 |
| Screw Size ["] | U.53K2-07 |
| Tonnes ["] | 3.0 |
| t ["] | 30.0 |
| Weight [Kg] | 2.4 |