

AN6.5X150SLS | AN-ANF.SLS - PROTWIST® screwdrivers for slotted head screws - milled blades





Standards:

NF ISO 2380-1, NF ISO 2380-2,
ISO 2380-1, ISO 2380-2, DIN ISO
2380-1, DIN ISO 2380-2, ASME
B107.600

Description:

- Tool equipped with a FACOM SLS attachment solution, preventing any risk of accidental falls.
- The crimped "rotating" cable solution, selected and tested by FACOM, maintains user ergonomics.
- Silicon carbon blade: strong and resistant to flexion.
- Bi-material grip resists to impacts, abrasion, and chemicals.
- Finish: black tipped mat chromed blade."

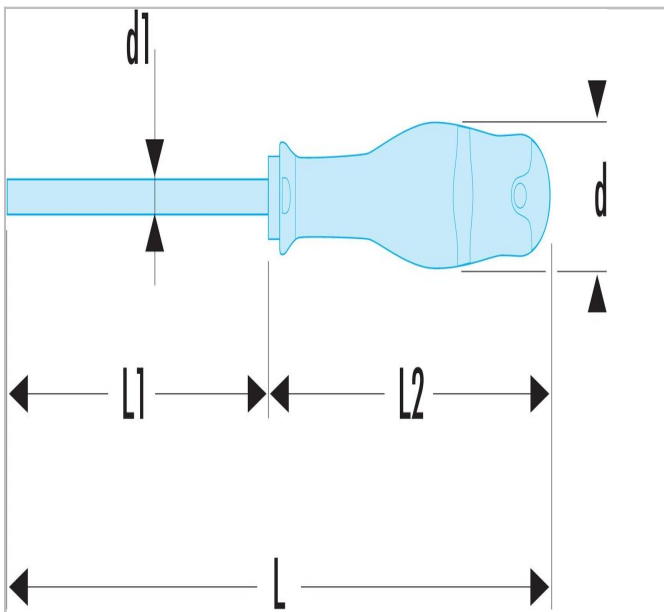

	AN6.5X150SLS
A [mm]	6.5
Diameter [mm]	25
Diameter D1 [mm]	6.5
Length L1 [mm]	150.0
Length L [mm]	259
Length L2 [mm]	103
Weight [Kg]	0.17
Thickness E [mm]	0.4
Width [mm]	6.5